



SPECIFICATION

Contact Rating: 7A/250VAC (C-UL&UL)
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute

SERIES NUMBER: SC06

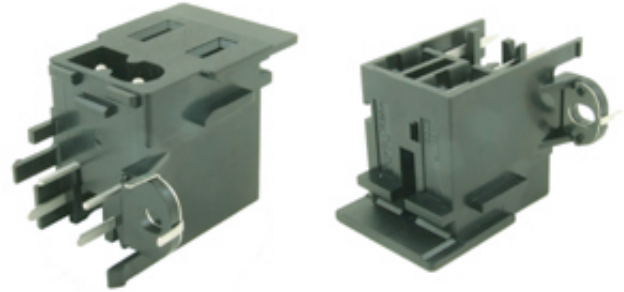

PART NUMBERING SYSTEM

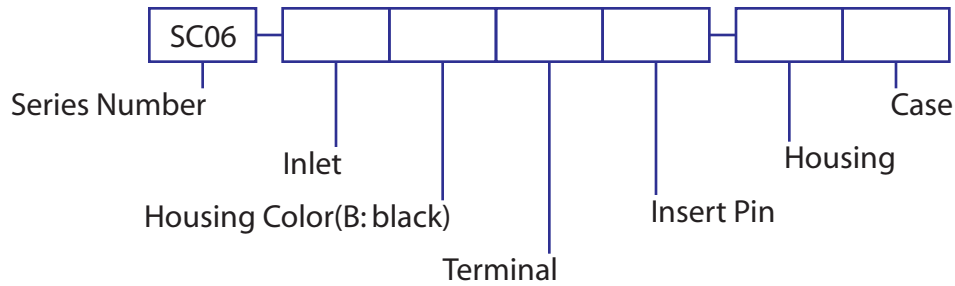

DIMENSIONS(mm)

