


SPECIFICATION

Rating: 0.5A 125VAC
 Contact Resistance: 30 milliohms max.
 Electrical Life: 500,000 cycles
 Mechanical Life: 1,000,000 cycles
 Operating Force: 13 to 160g
 Operating Temperature: -25°C to +65°C
 Ambient Humidity: 85% RH max.
 Operation Position: 6.85 to 7.15mm
 Reforce: 20 to 60g
 RoHS Compliant: Yes


MATERIAL

Actuator: PBT
 Base: PBT
 Case: PBT
 Spring Plate: Phosphor bronze plated gold
 Fixed Contact Terminal: Silver plated copper
 Fulcrum Terminal: Silver plated copper

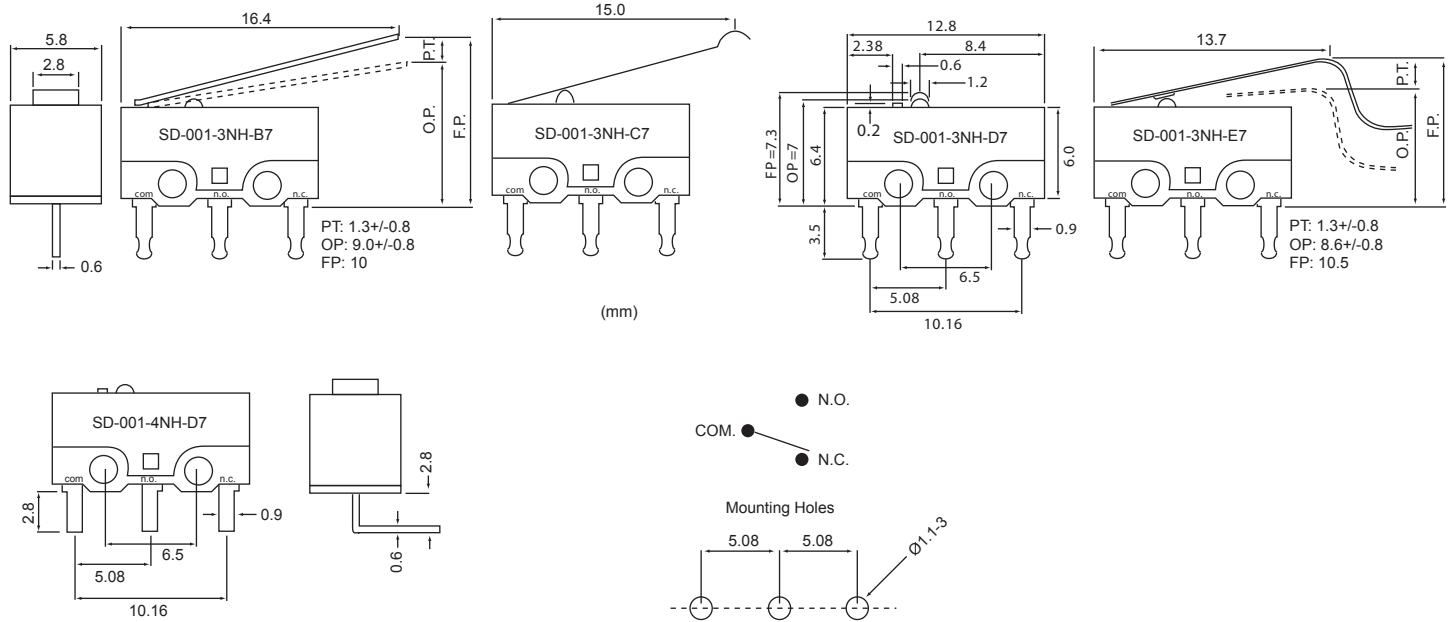

PART NUMBERING FORMAT

SD-001- [Terminal] NH- [Lever] [Operation Force] □ Ex: SD-001-3NH-A7

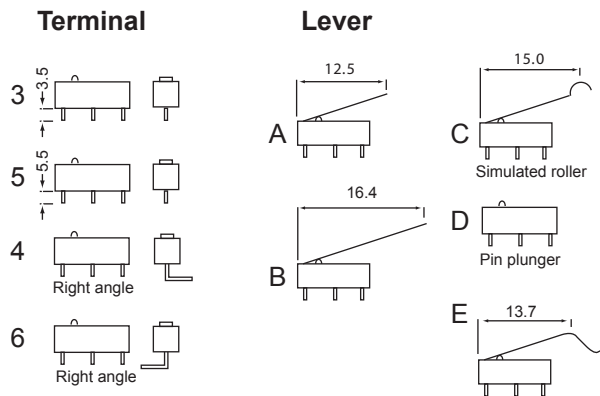

Operation Force
 1: 60~100g (w/o lever)
 2: 100~160g (w/o lever)
 7: 13~40g (w/ lever)