



SPECIFICATION

Contact Rating: 0.1A 30VDC
 Contact Resistance: 70mΩ (max) initial
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 500VAC/1 minute
 Circuit: 2C-2P
 Timing: non-shorting
 Electrical Life: 10,000 cycles
 Operation Force: 200+/-80g

SERIES NUMBER: IP-221

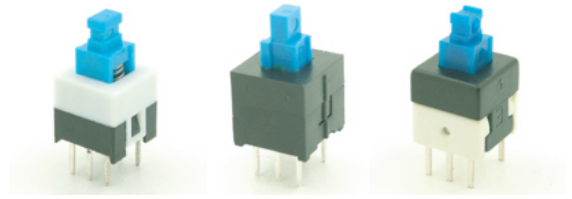


PART NUMBERING SYSTEM

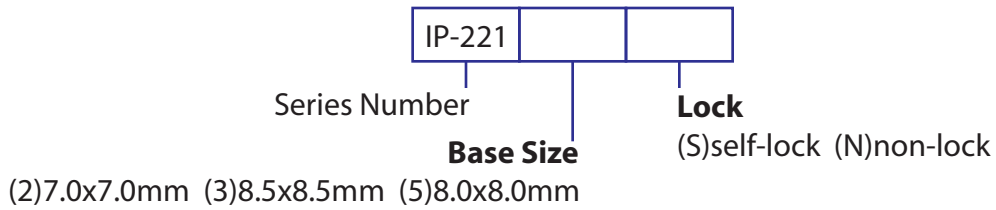


DIMENSIONS(mm)

IP-2212

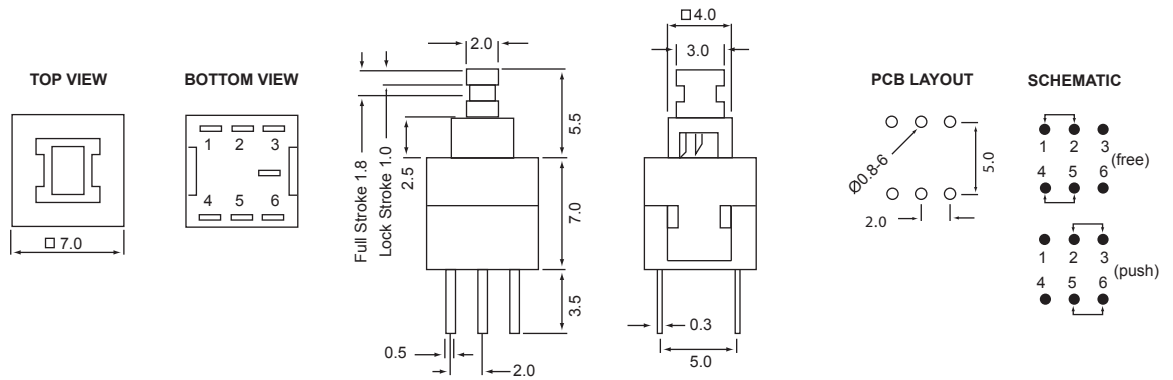

IP-2213

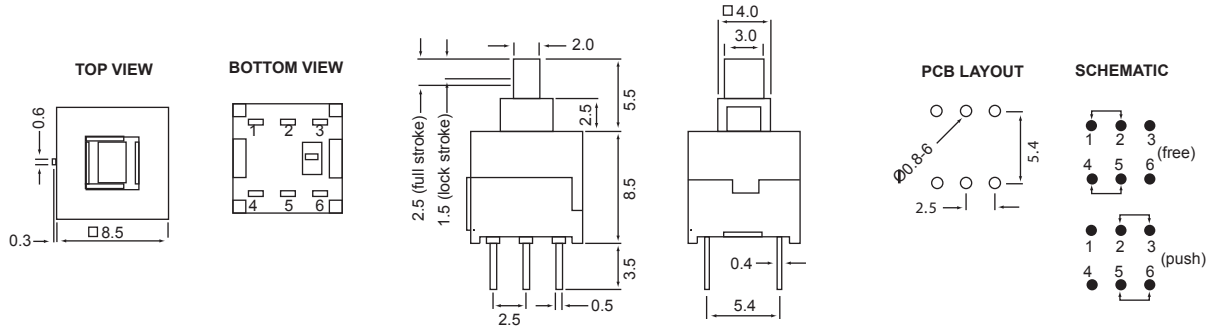

IP-2215

