SPECIFICATION

Contact Rating: 0.2A 30VDC
Contact Resistance: 20mΩ (max) at initial
Insulation Resistance: 100MΩ (min) 500VDC
Dielectric Strength: 500VAC/1 minute
Electrical Life: 20000 cycles
Operation Force: 300+/-100g
Pole-Position: 2-2

SERIES NUMBER: PS02



PART NUMBERING SYSTEM

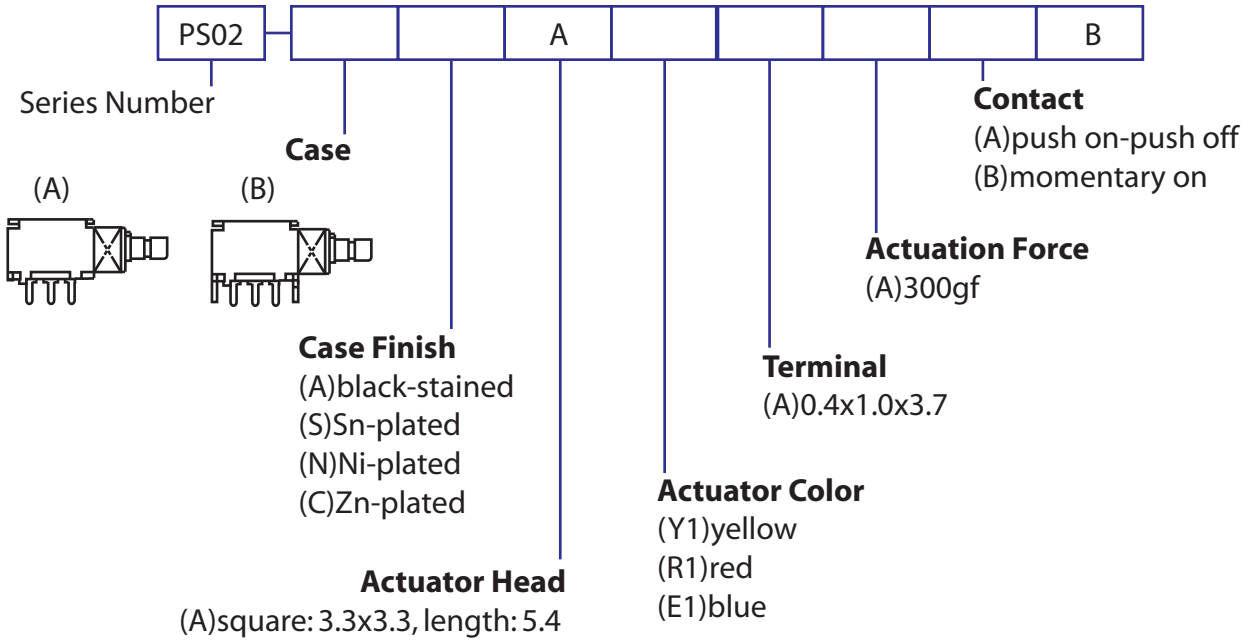
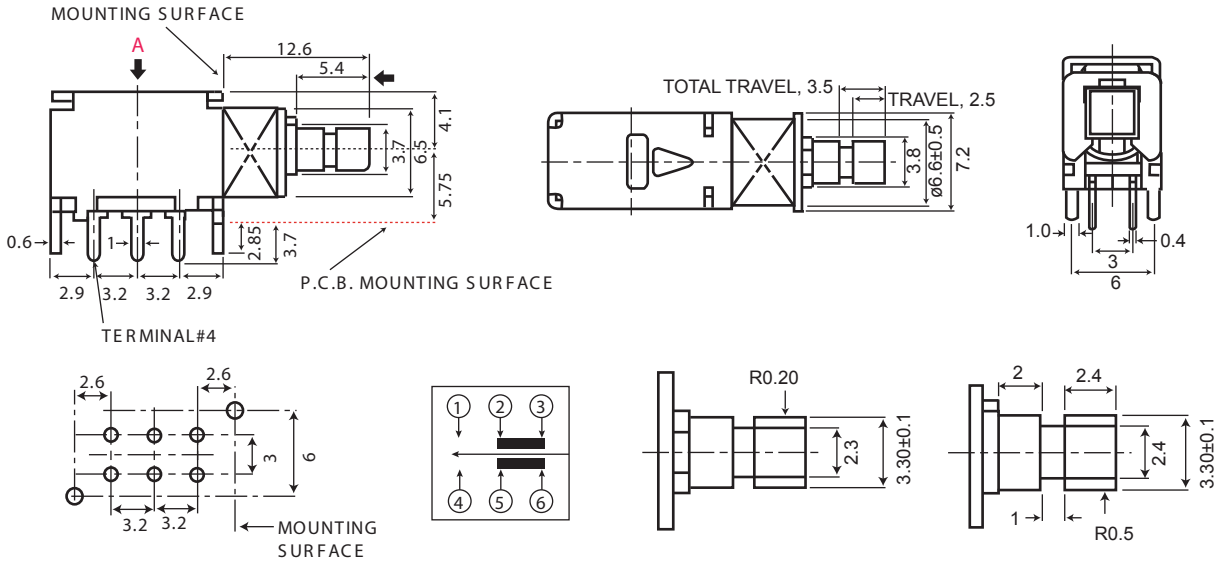
DIMENSIONS(mm)