



SPECIFICATION

Contact Rating: 10A/125VAC TV-8
 8A/128A 250V~ μ T85
 8A/125A 250V~ μ T85
 Inrush Current: 128A/125VAC 4ms
 Contact Resistance: 100m Ω (max) at initial
 Insulation Resistance: 500M Ω (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 25000 cycles
 Operation Force: 500+/-200g

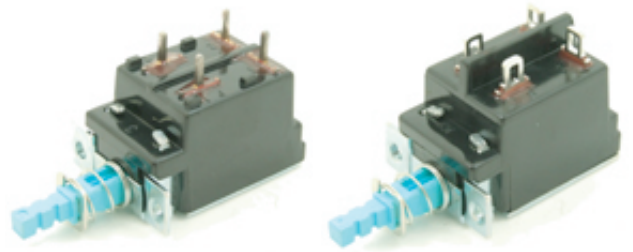

PART NUMBERING SYSTEM

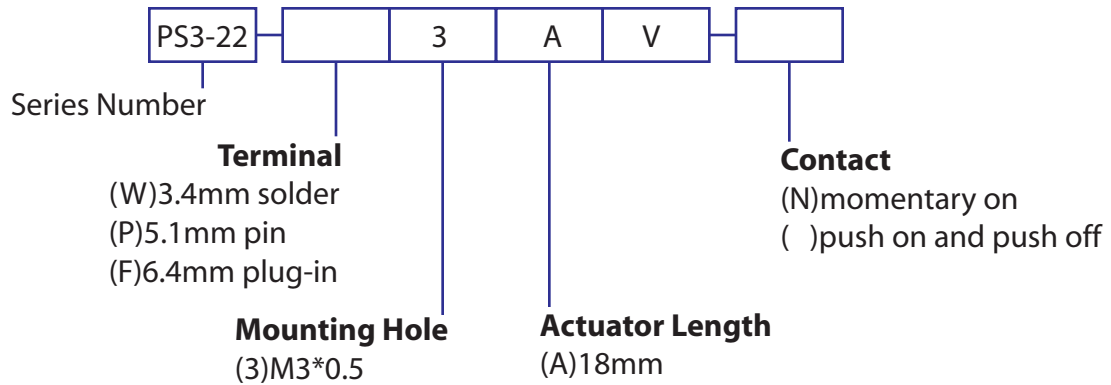

DIMENSIONS(mm)

