



SPECIFICATION

Contact Rating: 10A/125VAC TV-8
 8A/128A 250V~μT85
 Contact Resistance: 100mΩ (max) at initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 25000 cycles
 Operation Force: 500+/-200g

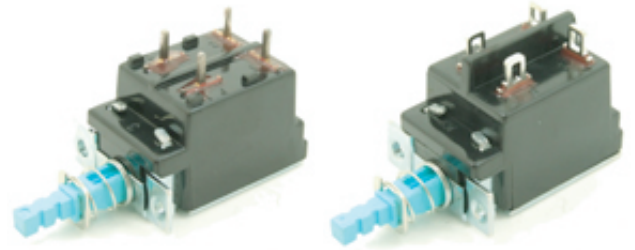

PART NUMBERING SYSTEM

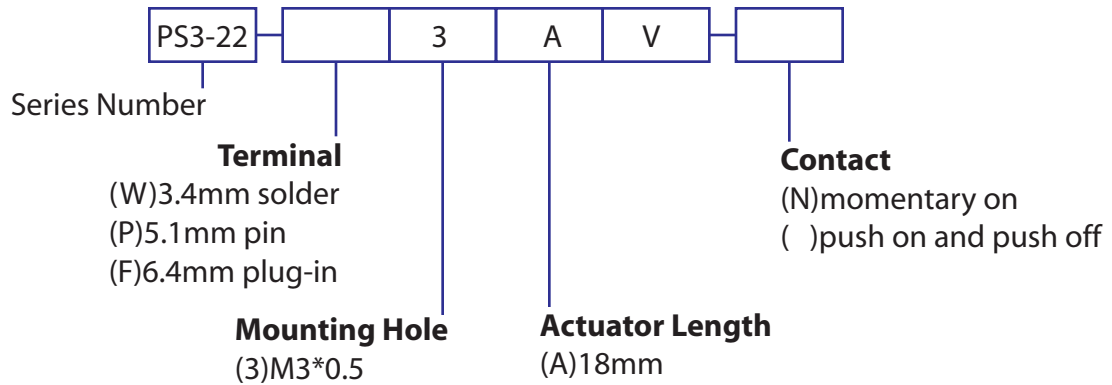

DIMENSIONS(mm)

