



SPECIFICATION

SERIES NUMBER: PS-5

Contact Rating: 8A 250VAC, TV-8 120VAC
 4A/128A 250V~ μ T85
 Contact Resistance: 20m Ω (max) at initial
 Insulation Resistance: 500M Ω (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 25000 cycles
 Operation Force: 450+/-150g



PART NUMBERING SYSTEM

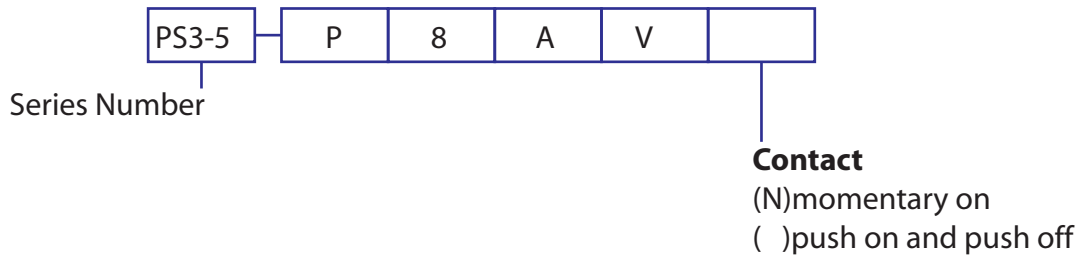

DIMENSIONS(mm)

