


SPECIFICATION

Contact Rating: 15A/125VAC 7.5A/250VAC T65
 10(4)A/16(6)A 250V~ T85/T55
 Contact Resistance: 20mΩ (max) at initial
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 50000 cycles
 Operation Force: 900+/-200g



PART NUMBERING SYSTEM

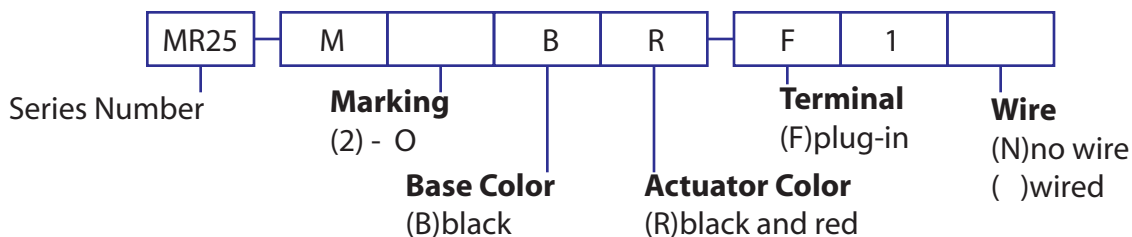

DIMENSIONS(mm)

