


SPECIFICATION

Contact Rating: 15A/125VAC 10A/250VAC (UL, CSA)
 Contact Resistance: 20mΩ (max) at initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 6,000 cycles
 Operation Force: 600+/-100g
 Operation Temperature: 0~85C

SERIES NUMBER: BR-21



PART NUMBERING SYSTEM

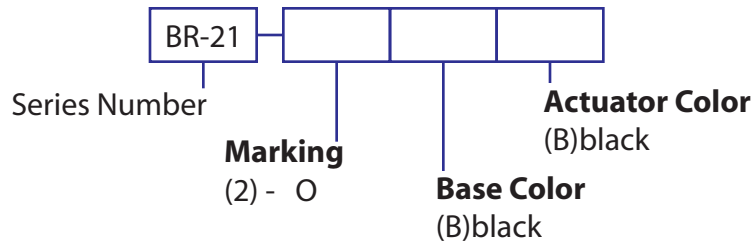

DIMENSIONS(mm)

