


SPECIFICATION

Contact Rating: 15A 250VAC (cUL)
 16(4)A 250VAC T85(ENEC)
 Contact Resistance: 20mΩ (max) at initial
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 10,000 cycles
 Operation Force: 800+/-300g

SERIES NUMBER: MR28



PART NUMBERING SYSTEM

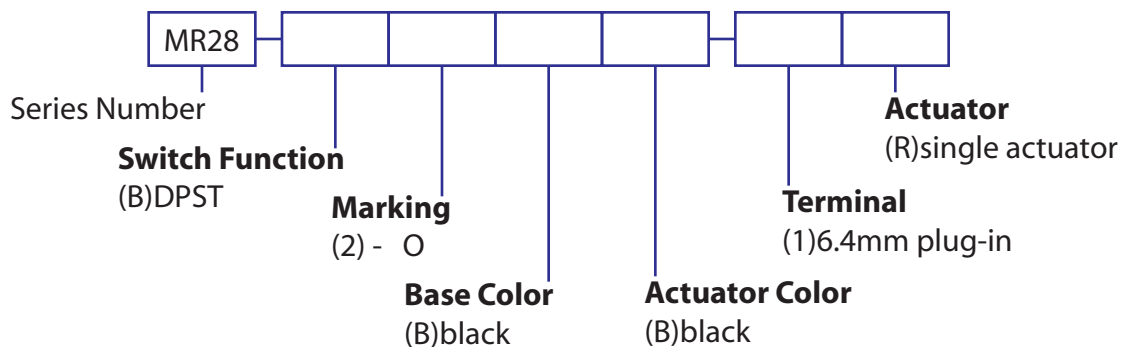

DIMENSIONS(mm)

