


SPECIFICATION

Contact Rating: 16A 125VAC; 16A 250VAC
 1/2HP 125VAC; 1HP 250VAC
 16A/150A 250V~ 16(6)A 250V~
 T85/55 5E4
 Contact Resistance: 10mΩ (max) at initial
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 50,000 cycles
 Operation Force: 1000+/-300g

SERIES NUMBER: OR05



PART NUMBERING SYSTEM

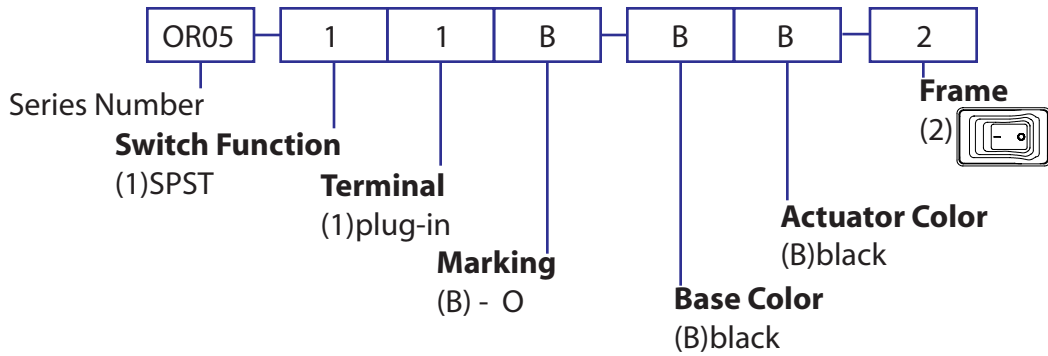

DIMENSIONS(mm)

