


SPECIFICATION

Contact Rating: 10A/125VAC 5A/250VAC(UL)
 10A/125VAC 7A/250VAC(CSA)
 6A/100A 250VAC~μT85(N,S,D,FI,VDE)
 Contact Resistance: 20mΩ (max)
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 10,000 cycles
 Operation Force: 900+/-300g



SERIES NUMBER: SR-1

PART NUMBERING SYSTEM

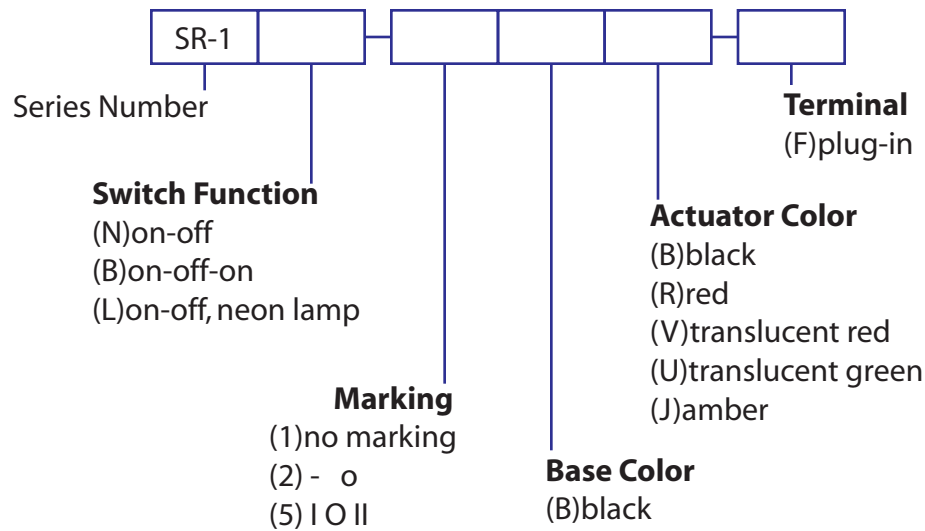

DIMENSIONS(mm)

