


SPECIFICATION

Rating: 12A 125/250VAC (UL, CSA)
 □ 10(1)A 250VAC~ μ T85 (VDE, D, S, N, FI)
 Dielectric Strength: 2,000VAC for 1 minute (terminal to terminal)
 Contact Resistance: 30 milli-ohms max.
 Insulation Resistance: 500 mega-ohms min. at 500VDC
 Operating Force: 400+/-100g
 Operating Temperature: 0°C to +85°C
 Approval: CSA, DEMKO, FIMKO, NEMKO, SEMKO, UL, VDE
 RoHS Compliant: Yes

MATERIAL

Case: Nylon 66 type / PA 66
 Actuator: PBT + glass lead in wire
 Contact: Silver plated copper
 Terminal: Silver plated copper
 Compression Spring: Stainless steel wire
 Base: Phenolic laminate

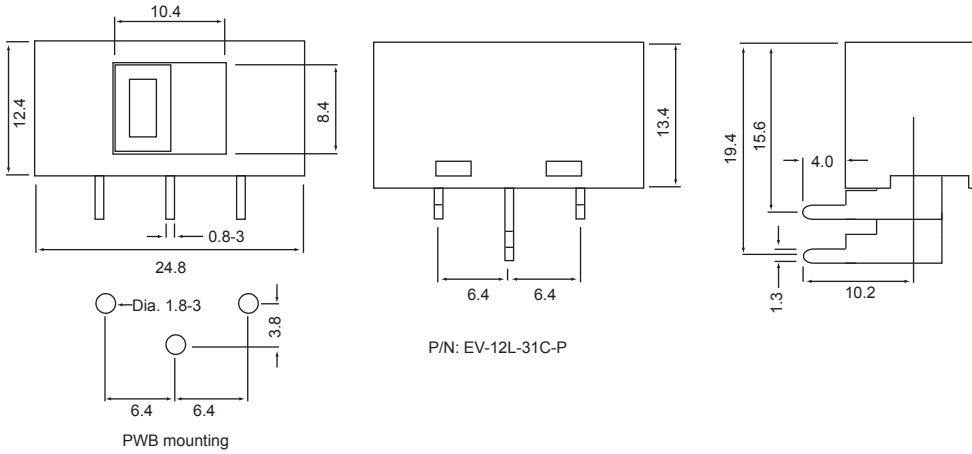

PART NUMBERING FORMAT

EV-12L - [Function] 1 [Marking] - P □ Ex: EV-12L-31C-P

Function	Marking
2: on-off	A: none
3: on-on	B: 230 115
	C: 230V 115V