


SPECIFICATION

Circuit: 3PDT.
 Rating: 10A 250VAC (CSA, UL).
 Rating: 10(1)A 250~μT85 (DEMKO, FIMKO, NEMKO, SEMKO, VDE).
 Dielectric Strength: 3,800VAC for 1 minute (cover to terminal).
 Dielectric Strength: 2,000VAC for 1 minute (terminal to terminal).
 Contact Resistance: 20 milliohms max.
 Insulation Resistance: 500 megaohms min. at 500VDC.
 Operating Force: 1000+/-200g.
 Operating Temperature: 0°C to +85°C.
 Safety Standard Approval: CSA, DEMKO, FIMKO, NEMKO, SEMKO, UL, VDE.
 RoHS Compliant: Yes

MATERIAL

Actuator: PBT.
 Base: PBT.
 Frame: Zinc plated iron.
 Movable Contact: Silver plated copper.
 Spring: Stainless steel wire.
 Terminal: Tin plated copper.
 Jumper Terminal: Tin plated copper.

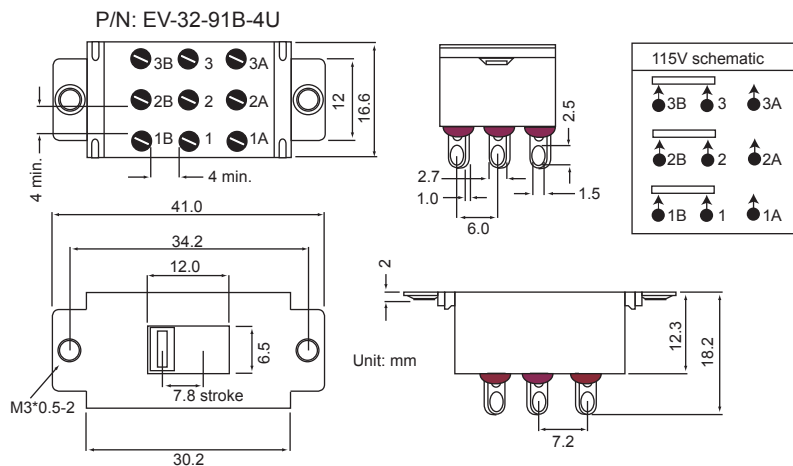

EV-33 SLIDE SWITCH

SPECIFICATION

Circuit: 3P3T
 Rating: 10A 125VAC/250VAC (C-UL)
 Dielectric Strength: 3,800VAC for 1 minute (cover to terminal)
 Dielectric Strength: 2,000VAC for 1 minute (terminal to terminal)
 Contact Resistance: 50 milli-ohms max.
 Insulation Resistance: 500 mega-ohms min. at 500VDC
 Mechanical Life Cycle: 6,000 cycles
 Operating Force: 1000+/-200g
 Safety Standard Approval: UL
 RoHS Compliant: Yes

MATERIAL

Actuator: PBT
 Base: Phenolic
 Frame: Zinc plated iron
 Movable Contact: Silver plated copper
 Spring: Piano steel wire
 Terminal: Tin plated copper
 Fixed Positionpiece: Stainless steel

