



SPECIFICATION

Contact Rating: 6A/1250VAC, 3A/250VAC(CSA,UL)
 Contact Resistance: 50mΩ (max) at initial
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 1800VAC/1 minute
 Electrical Life: 6000 cycles
 Operation Force: 500+/-200 gram(DP)
 Operation Temperature: 0~85C

SERIES NUMBER: SL1-22

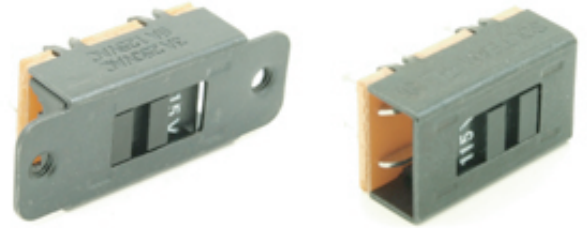

PART NUMBERING SYSTEM

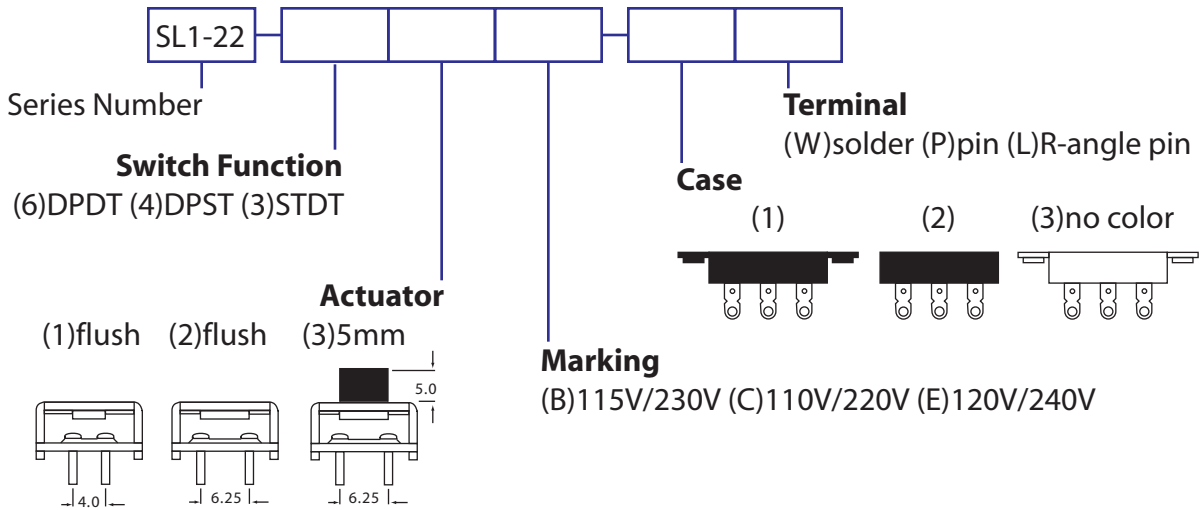

DIMENSIONS(mm)

